


### 性能参数Specification:

频率(Freq): 6.57-9.99GHz  
 法兰(Flange): FBP/FBE/FBM  
 驻波(VSWR): 小于1.20  
 插损(IL): 小于0.3dB  
 接头(Connector): N/SMA  
 材料(Material): 铜/铝 Cu/Al  
 承受功率(CW): 30W  
 涂覆(Coating): 铜镀金  
 铜钝化  
 铝氧化  
 Cu gilding  
 Cu passivation  
 Al oxidation

### 型号选择Model selected:

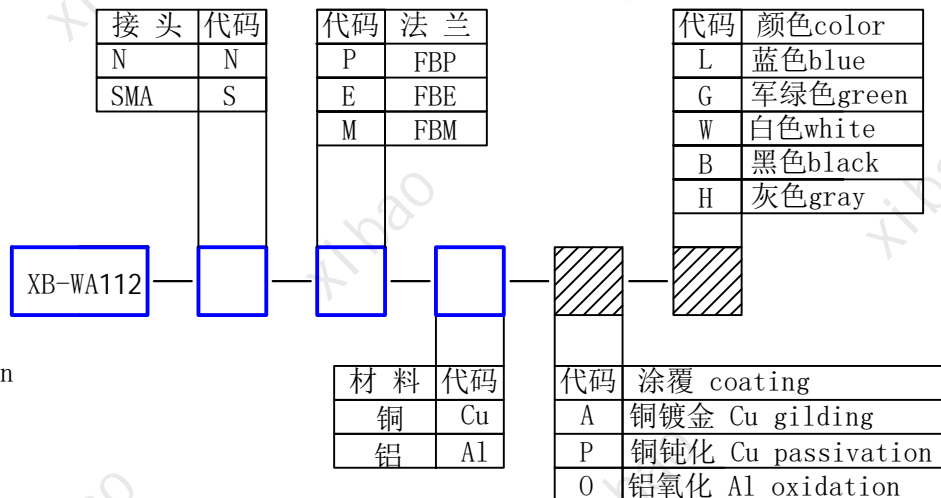

### 说明Instruction:

蓝色框内容为必选项。  
 斜线框内容不选择时，按库存随机发货。  
**Blue boxes are must required fields.**  
**Shadow boxes aren't option, randomly selected according to inventory.**

北京西宝电子技术有限责任公司 Beijing Xibao Electronic Technology Co.,Ltd
正交型波导同轴转换 (WR112/BJ84) Waveguide to Coaxial Adapter (WR112/BJ84)
<a href="http://www.beijingxibao.com">www.beijingxibao.com</a> 010-62312909 62327421